



SABIN ENTERPRISES

Exporters of Agricultural Machinery & Equipments
28, 3rd Floor, Sucheta Nivas, 285, S B S Road, Fort, Mumbai – 400 001
Tel.: 91 22 7963 5873 Email: sabinenterprises93@gmail.com

TRACTOR MODEL 5075E 75 HP 4 WD- MANUFACTURED BY JOHN DEERE

- Power steering
- Hydraulically actuated & self-adjusting disc brakes
- Suspended pedals for clutch and brakes
- Radiator with overflow reservoir
- Highly ergonomic system of control levers on the sides
- Planetary gear reduction as final drive
- Dry type air cleaner
- Tyre Size: Rear – 18.4 x 30, Front – 12.4 x 24
-

Accessories Include:

Wheel weight: front – Bumper, Rear – Weight 1 + 1



Powerful, turbo charged, fuel efficient new John Deere engine with Inline FIP



Tilt Steering for operator comfort adjustable up to 25° tilt, with lock latch



EQRL Easy hitching and unlash of implement through EQRL switches



Smart Brakes Self adjusting, self-equalizing, hydraulically actuated, oil immersed disc brakes



Mobile Charging Point with Holder



SABIN ENTERPRISES

Exporters of Agricultural Machinery & Equipments
 28, 3rd Floor, Sucheta Nivas, 285, S B S Road, Fort, Mumbai – 400 001
 Tel.: 91 22 7963 5873 Email: sabinenterprises93@gmail.com


Technical Specifications

ENGINE	
Type	: 75 HP (55.9KW), 2400 RPM, 3 Cylinder, Turbo Charged, Direct Injection, Rotary pump, Liquid cooled with over flow reservoir
Air filter	: Dry type, dual element
TRANSMISSION	
Type	: Synchromesh Transmission- (TSS)
Clutch	: Dual
Gear Box	: 9 Forward + 3 Reverse
Speeds	: Forward 2.2 to 31.3 kmph Reverse 3.6 to 24.2 kmph
BRAKES	
	: Self Adjusting, Self equalising, Hydraulically Actuated, Oil immersed disk brakes
HYDRAULICS	
Maximum Lifting capacity	: 2000 kgf
3 Point linkage	: Category II Automatic depth & draft control
STEERING	
Type	: Power Tiltable upto 25° with lock latch
FRONT AXLE	
	: Specially designed heavy duty front axle for MFWD
POWER TAKE OFF	
Type	: Independent, 6 splines
RPM	: Dual PTO - Standard : 540 @ 2376 ERPM & Economy : 540E @ 1705 ERPM

WHEELS AND TYRES	
Front	: 12.4 X 24 (0.31 X 0.61m)
Rear	: 18.4 X 30 (0.47m X 0.76m)
FUEL TANK CAPACITY	
	: 68 litres
ELECTRICAL SYSTEM	
	: 88 Ah, 12 Volt Battery
	: 40 Amp, Alternator
	: 12 Volt, 2.5 kW Starter Motor
DIMENSIONS AND WEIGHT	
Total weight	: 2640 kg
Wheel base	: 2050 mm
Overall length	: 3625 mm
Overall width	: 1880 mm
Ground clearance	: 460 mm
Turning radius with brakes	: 3604 mm
OPTIONAL ACCESSORIES*	
	: Ballast Weight • Canopy • Drawbar • Wagon Hitch
ADDITIONAL FEATURES	
	: International look • Exhaust Muffler guard • Car type engine ON/OFF • Radiator with overflow reservoir • Water Bottle Holder • Mobile Charger + Holder
OPTIONS	
	: Creeper Speeds
	: Tyre Size : Front Tyre : 11.2 X 24 (0.28 X 0.61m) : Rear Tyre : 16.9 X 30 (0.43 X 0.76m)

Note: Some of the options may not be available in all combinations.
 For variants please check with your nearest dealer.

New 75 HP 4WD Model 5075 E

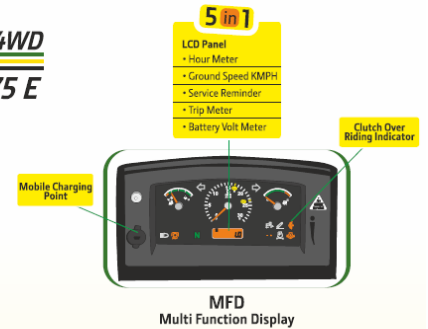

Finger guard
Enhanced safety



Single piece hood opening with gas struts
Ease in opening



PTO shield
Enhanced safety



Go Home Feature
Reach home safely in the dark



Side bar & steps
Climbing up and down the tractor is now easier



High torque reserve
More productivity

John Deere Genuine Parts

| Economical | Reliable |
| Easily available |

